



Boring Heads

Diameter Range: 3.00 mm - 208.00 mm




+ 4.5
- 0.1
Fine Radial Stroke

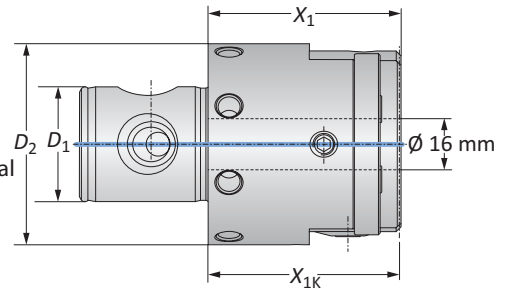


MVS Connection	Boring Head		Weight	Part No.	
	$D_2 D_1$	Boring Range			X_1
63 - 36	3.00 - 208.00	60.00	59.50	1.30 (kg)	450001


B10-M: 12-13



B10-F



B10: VI-VII



Key on B10-A:1

= Metric (mm)

IMPORTANT: Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.
 email: engineering.eu@alliedmachine.com